


HP TIMER RELAY



FEATURES

- ⊙ Double 4-digit LED display
- ⊙ High accuracy
- ⊙ Data holding for power fail
- ⊙ Optional dimensions

CODE ILLUSTRATION

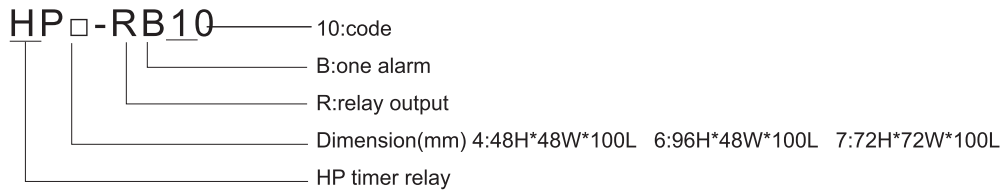


ORDERING CODE

Model	Dimension	Range	LED display	Output model
HP4-RB10	48H*48W*100L	0.01S~999.9H	4	R、N、F
HP6-RB10	96H*48W*100L	0.01S~999.9H	4	R、N、F
HP7-RB10	72H*72W*100L	0.01S~999.9H	4	R、N、F




TECHNICAL SPECIFICATION

Power supply	50Hz/60Hz AC 220V/110V±10%
Energy consumption	<6W
Accuracy	±0.5%
Reset time	<0.2S
Max load	AC 250V 3A resistance load
Timer range	0.01S~999.9H
Delay range	0.1S~999.9H
Ambient temp	0℃~+50℃
Ambient humidity	45~75% RH
Life	Mechanical life:5 million times above;electrical life:100 thousand times above for rated load

PANEL ILLUSTRATION

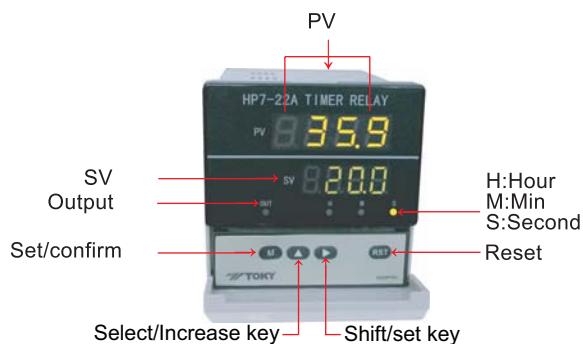

CONNECTION

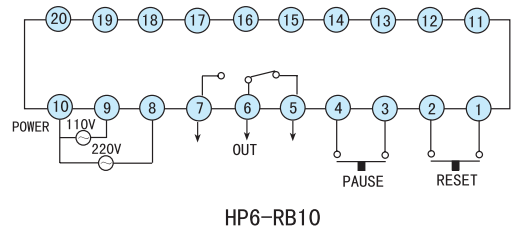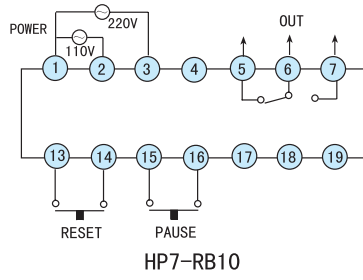

DIMENSION

